




A Series Air Filter




SPECIFICATIONS

Function :	Modular Air Filter Unit
End Connection :	Screwed
Body Material :	Aluminium Die Cast
Valve Assembly & Seal :	Brass, NBR
Filter Element :	Bronze
Bowl Assembly :	Polycarbonate with Metal Bowl Guard
Media :	Air
Max. Operating Pressure :	10 Bar
Working Pressure :	0.5 to 8.5 Bar
Proof Pressure :	15 Bar
Drain Function :	Differential Drain

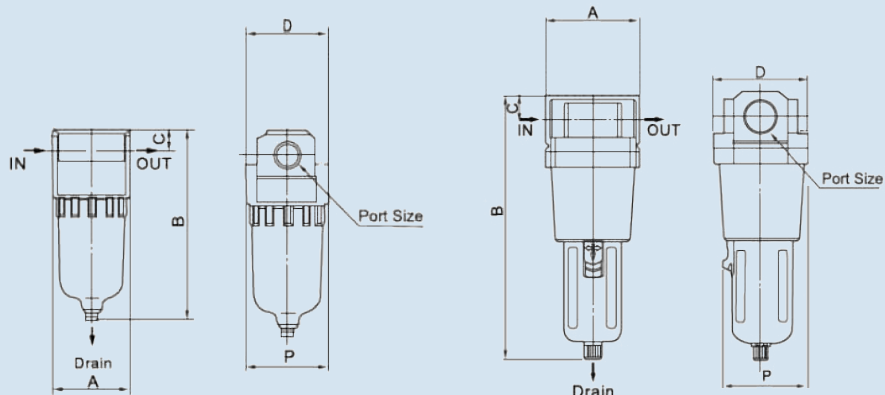

F-02

F-10

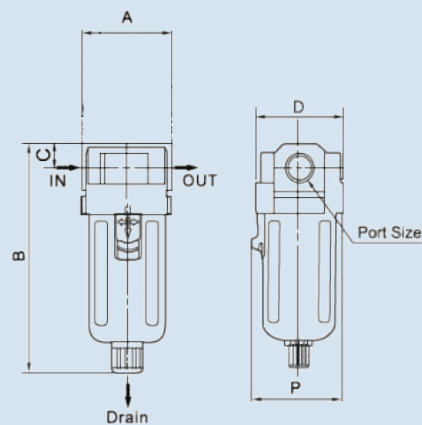


F-02G | F-03 | F-04 | F-06

DIMENSION

Model	Port	A	B	C	D	P
F-02	1/4"	40	97.5	11	40	40
F-02G	1/4"	40	114	11	40	40
F-03	3/8"	40	132.5	14	53	40
F-04	1/2"	70	168.5	18	70	73
F-06	3/4"	75	172.5	20	70	73
F-10	1"	90	247.5	24	90	90

TECHNICAL DATA

Model	Port Size	Bowl Guard	Fluid	Temperature	Filtration Rating	Working Pr. Range	Nominal Flow Rate L/Min*
F-02	1/4"	NA	Air	5 to 60 °C	40 µm	0.5 to 8.5 Bar	750
F-02G	1/4"	Metal Cover	Air	5 to 60 °C	40 µm	0.5 to 8.5 Bar	750
F-03	3/8"	Metal Cover	Air	5 to 60 °C	40 µm	0.5 to 8.5 Bar	1500
F-04	1/2"	Metal Cover	Air	5 to 60 °C	40 µm	0.5 to 8.5 Bar	4000
F-06	3/4"	Metal Cover	Air	5 to 60 °C	40 µm	0.5 to 8.5 Bar	6000
F-10	1"	Metal Cover	Air	5 to 60 °C	40 µm	0.5 to 8.5 Bar	7000



Circuit Diagram

* **Condition** : Under Standard Condition